


# Aus-Lev 2-20 Rapid

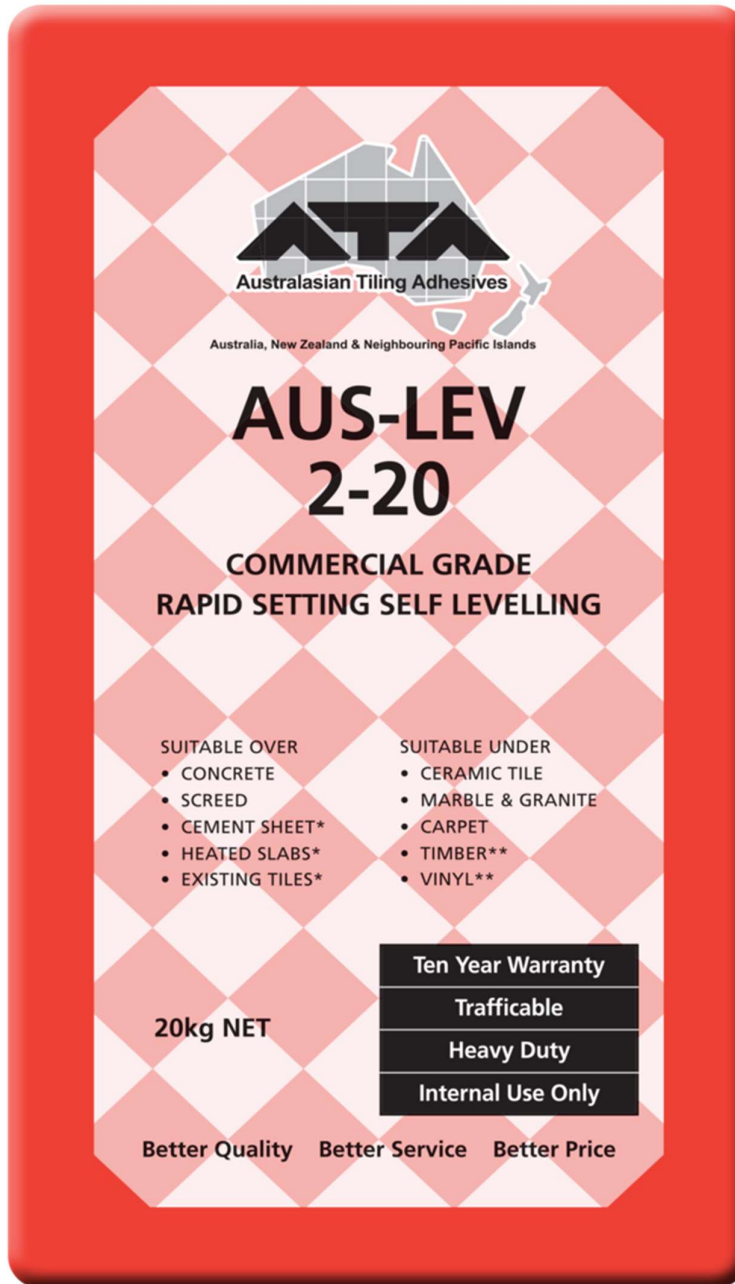

High performance, self-levelling compound for internal use on uneven cement based screeds, concrete floors, underfloor heating and cement sheet floors. Can be used as an over-layment in light traffic areas.

Available in grey 20kg

## Uses

Specially designed for use underneath:

- Tile
- Stone
- Timber
- Carpet
- Vinyl

Internal Use.

## Coverage

| Coverage per bag *           |
|------------------------------|
| 1m <sup>2</sup> @ 10mm thick |

*\*Coverage of adhesives, screeds and membranes are a guide only as there are other factors to take into account. Large tiles consume more adhesive, rough out of plain surfaces consume more materials. Tiles should always be installed as per Australian Standards and good trade practices. Tile and stone should be fully bedded to provide long term support and durability. Large tile and stone should be back buttered to ensure good bond.*

